



By:



Power-Line Communication Lightbar Guide to Operations

System Features:

- Your complete system should include:
 - Lightbar with bolt-on base and 8' cable.
 - 6-button Power-Link controller with 5" of wire.
 - Hardwire Transmitter to control S/T/T portion of PLC56U that is also compatible with any current TowMate wireless tow light.
- Installs easily with only two wires!
 - Our patent pending technology eliminates the need to wire the lightbar directly to the control console in the cab. Instead, our design allows the

system to operate by simply hooking the two components up to power and ground.

- Lifetime Warranty
 - Covers Electronics and LED's
 - If ever the light fails to get a signal or an LED burns out, TowMate will replace the defective component at **no cost**.

Installation Instructions:

1. Decide which power source you will be tapping into in order to power the lightbar itself.
 - a. Connecting to a switched 12V power source is recommended for installation of the lightbar.
2. Mount the lightbar to the cab using the bolt-on assembly provided.
3. When installing the controller, tap into a separate 12V+ circuit than what the lightbar is connected to. Connecting to 12V+ off of the ignition is typically recommended.
 - a. Be sure it is still within the same 12V system of the truck if the truck has multiple 12V systems.
4. Mount your 6-button control pad where you can easily access it to activate your system.
5. Install the hardwire transmitter in the truck by connecting the appropriate wires to the trucks ground, turn signal, and brake (if separate from the turn signals) wires.
 - a. Green = Right Turn
 - b. Yellow = Left Turn
 - c. Red = Brake
 - d. White = Ground
6. Activate the left turn signal before powering the lightbar on, then power the bar on and allow approximately 10 seconds for the two to link.
7. The unit should now be fully operational.

Instructions for Adjusting Controller Signal Power:


Some PLC installations require more signal power than other installs. The following is an explanation of the procedure for setting the output power level.

1. Preparing your control
 - a. Apply 12V power to the 6-button control. Verify that the PLC indicator is flashing red/green. Also, verify that all other functions are “activating” on the control.

- b. REMOVE POWER
- 2. While pressing and holding the top left (Button 1/Left Arrow), reapply power.
 - a. The upper left LED will stay on steady.
 - b. The current power level setting is displayed on the bottom 3 LEDs. See example picture.



- 3. Press the upper right button to change the power level.
 - a. Each press will increment the power setting one position. Once the max level is reached, the power level will loop back to zero with the next press of the button.

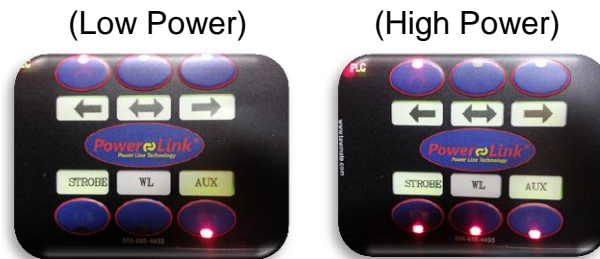

- 4. To finish the power level setup, disconnect and reconnect power.
- 5. To verify the power setting, repeat step 2.

General Operating Tips:

- 1. When the control and light bar have power, they will be ready to communicate at the push of a button.
- 2. The six buttons on the control pad are labeled according to their function (i.e. left arrow, center out, right arrow, strobe, work lights, and auxiliary).
- 3. The work lights and auxiliary functions can work in conjunction with, or separate from, any of the arrow or strobe patterns.
 - a. The auxiliary function allow for system expansion utilizing our PLC50 and PLC100 series of LED modules for the truck body.

Warranty/Service:

1. As with **all** TowMate products, there is a lifetime warranty on the electronics and LED's.
2. If you have any questions, or think you may require service, please call (800) 680-4455, and we will be happy to help.

Also check out our other Power-Link lighting options



Features:

- Connects to any power and ground on the truck and is compatible/controllable with the PLC56 lightbar controller.
- PLC-TX transmitters (to be wired in line of any switch panel) can also be purchased separately to control these in the absence of a PLC56 lightbar.
- These modules have several programmed patterns that can be chosen with the wave of a magnet over one end of the lens upon setup.
- When used with a PLC56 lightbar, the lens can be linked to activate with the specific functions of it. (example: activate markers to flash on the left side of the truck when the left arrow pattern is chosen)
- These lenses eliminate the need to run wires all the way from a central controller to the lens. Instead, tie into power and ground on the same circuit from either component.
- Lifetime Warranty